

SCOTTISH ENVIRONMENT PROTECTION AGENCY

POLLUTION PREVENTION AND CONTROL ACT 1999

**POLLUTION PREVENTION AND CONTROL (SCOTLAND) REGULATIONS 2000
("THE REGULATIONS")**

SCHEDULE TO NOTICE OF VARIATION UNDER REGULATION 13(5)

Operator: William Tracey Limited
Permit Number: PPC/A/1017028 (As Varied)
Date of Permit: 5 September 2007
Variation No: 02

Permit number PPC/A/1017028 (As Varied) has been varied as follows

1. Condition 1.1.3.3 has been inserted as follows:
 - 1.1.3.3 the recovery (within the meaning of the Waste Directive) involving hazardous waste in excess of 10 tonnes per day within the description recycling/reclamation of inorganic materials (R5), being an activity falling within paragraph c(ii) of Part A of Section 5.4 of Schedule 1 of the Regulations.


2. Condition 1.1.4.2 has been deleted and replaced as follows:
 - 1.1.4.2 ash waste delivery and storage systems, with a capacity of 1000 cubic metres, more particularly described below;
 - a) 8 reception tanks for receipt of waste ash and storage of processed materials
 - b) Associated pumps and pipe work.

3. Condition 1.1.4.4 has been inserted as follows:
 - 1.1.4.4 ash waste separation plant, with a throughput of 20 tonnes per hour, more particularly described below;
 - a) An air classifier
 - b) Associated filters and pipe work.

4. Condition 1.1.5.4 has been inserted as follows:
 - 1.1.5.4 the generation of electricity in a diesel fired generator.

5. Condition 1.1.5.5 has been inserted as follows:
 - 1.1.5.5 the storage of diesel in bunded above ground storage tanks.

6. Condition 1.2 has been deleted and replaced as follows:

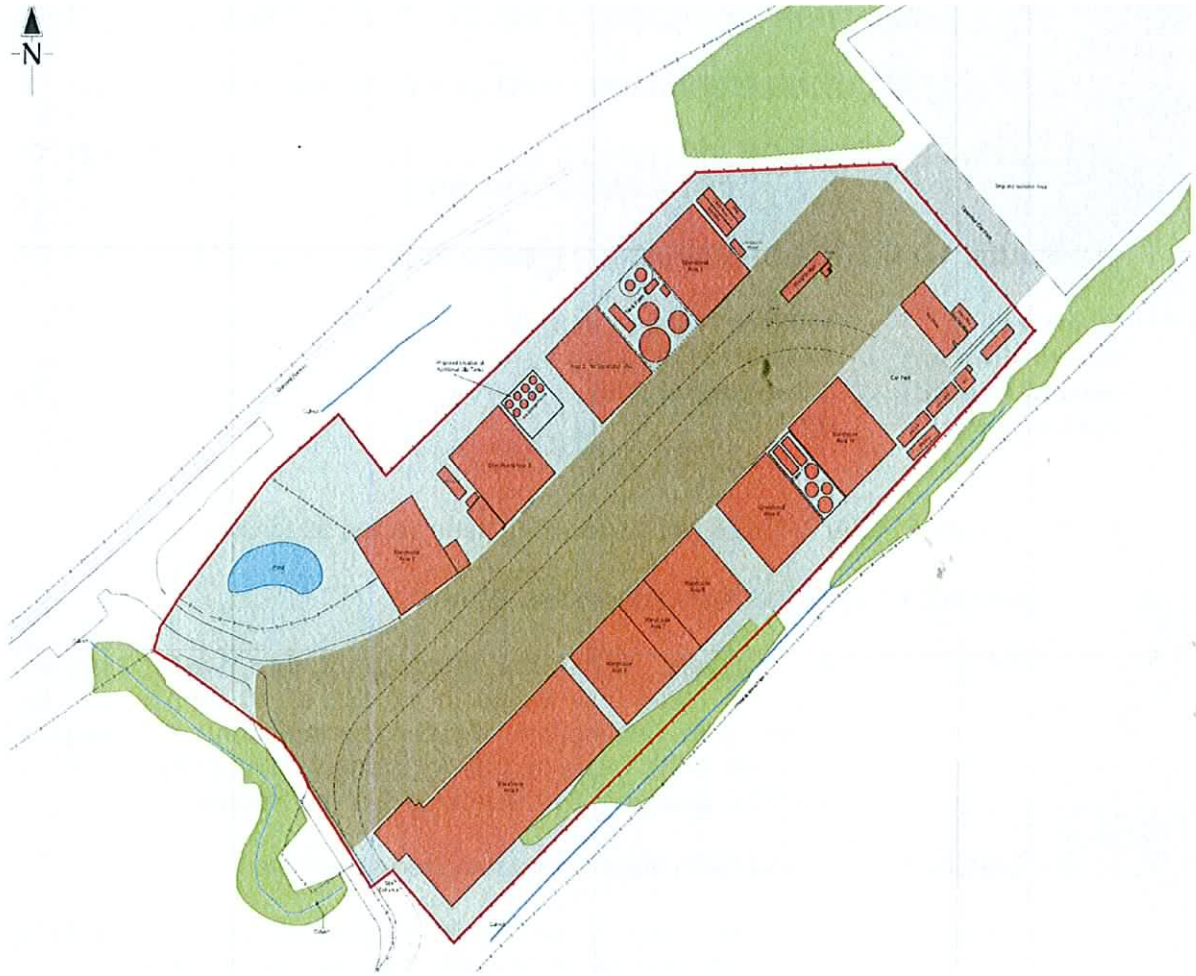

7. Table 3.2 has been deleted and replaced as follows:

Table 3.2

Column 1	Column 2
Waste Accepted	Yearly tonnage
Hazardous solid waste	100000
Non-hazardous solid waste	80000
Hazardous liquid waste	20000
Non-hazardous liquid waste	50000

8. Condition 3.14 has been inserted as follows:

3.14 The Operator shall prepare and implement a commissioning plan for the ash waste separation plant which sets out how it will operate the plant in a manner so as to comply with any Condition of this Permit.

9. Condition 3.14.1 has been inserted as follows:

3.14.1 The Operator shall prepare a report in respect of the commissioning of the ash waste separation plant under Condition 3.14. The said report shall be completed no later than 1 month from the end of the commissioning.

10. Condition 6.3.4 has been inserted as follows:

6.3.4 The Operator shall carry out a systematic assessment of fugitive emissions from the ash waste separation plant as part of the commissioning process. The purpose of which shall be to quantify emissions from the process and identify methods of reducing emissions to air and their impact.

11. Condition 6.5.7 has been inserted as follows:

6.5.7 The Operator shall carry out plant commissioning tests to characterise and quantify noise emission from the ash waste separation plant equipment at source and at nearby noise sensitive receptors in accordance with recognised British Standards or equivalent. The noise survey shall be submitted to SEPA as part of the commissioning report.

12. Condition 6.5.8 has been inserted as follows:

6.5.8 Any deviations from the expected performance shall be rectified as part of the commissioning process.

Page left
intentionally blank

