

Technical Data Sheet

Plastic Regrind FPP WEEE Derived Plastics



Technical Data Sheet | Plastic Regrind




FPP WEEE Derived Plastics

Material	FPP WEEE Derived Plastics Regrind				
General Information	100% Post-consumer derived, REACH & RoHS compliant FPP granulate				
Attributes	 Purity - 98% FPP (mixed fillers) Moisture - ~0.6% Bulk Density - 525 Kg/m³ Typical Compounded MFR (ISO1133 2.16Kg @ 230°C) - 9g/10mins 				
Packaging	Bulk Bags				



Particle Size Distribution

Size	Fines	>3.15mm	>4.5mm	>5.6mm	>6.7mm	>8mm	>9.5mm
%	4	16.5	21.5	21.5	19	12	5.5
25							

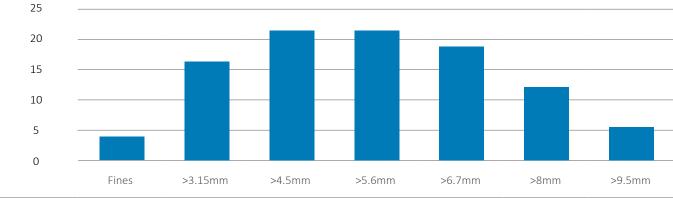

The values stated in this document are typical values and should not be construed as a specification. It is the purchaser's responsibility to ensure that the material is suitable for the intended application.

Recycled plastic - a sustainable and cost effective alternative.



Contact us for further information on our range of plastic compounds:

T. 01775 670226 plastics@enva.com

Enva Plastics Limited

Tunnel Bank Road, Bourne, Lincs, PE10 0DJ

environment matters

enva.com/plastic