

# MINI SIGMA

Innovative automatic self-cleaning filter.  
 Lightweight and durable with maximum  
 installation flexibility.



**Registered Patent**

	2"	3"	4"
maximum flow rate	30 m <sup>3</sup> /h (132 gpm)	50 m <sup>3</sup> /h (220 gpm)	80 m <sup>3</sup> /h (352 gpm)
inlet/outlet diameter	50 mm (2")	80 mm (3")	100 mm (4")
filtration degrees	50-500 micron		
minimum operating pressure during flush cycle	1.5 bar (22 psi)		
maximum operating pressure	8 bar (116 psi)		

## features:

- Reliable and durable
- Amiad's unique suction-scanner cleaning technology
- Modular design with various installation configurations
- Polymeric filter - corrosion free
- Low water and energy consumption
- Compact design and small footprint
- Easy installation and low maintenance
- Amiad's innovative and user friendly ADI-P electronic controller, operated by a mobile app for advanced monitoring capabilities

## How the Mini Sigma Filter Works

### General

Amiad's Mini Sigma filter is the newest addition to the Sigma family. It is a small and lightweight yet durable filter; quick and easy to install, simple to operate, and requires minimal maintenance. The Mini Sigma filter was developed to handle low pressure operation, with a capacity of up to 80 m<sup>3</sup>/h (352 gpm) and with filtration degrees from 50-500 micron. Inlet/outlet connections are available in 50 mm (2"), 80 mm (3"), and 100 mm (4") diameter. Filters include a 40 mm (1.5") flush valve.

### The Filtration Process

Raw water enters through the filter's inlet and passes first through the pleated coarse screen which catches large debris and sediment. The unique pleated design of the coarse screen provides a larger screen area, increasing the filter's capability to handle high dirt loads of large particles. The water then continues to flow through the filter and passes through the inner fine screen which catches the remaining smaller particles.

### The Control System - Amiad's NEW ADI-P Controller

Amiad's ADI-P controller offers a one-of-a-kind monitoring and control functionality. The controller interacts with Amiad's advanced, user-friendly app that provides detailed filtration performance data on your mobile phone device.

The self-cleaning mechanism is controlled and monitored by the ADI-P controller. The self-cleaning cycle is triggered by an integrated DP switch.

The ADI-P controller and mobile app also provide:

- DP and flush cycle counters
- Alerts – low/high pressures, low battery
- Reports and performance history data

### The Self-Cleaning Process

The self-cleaning cycle is initiated by any one of the following conditions:

1. Signal from the DP switch, pre-set at 7 psi (0.5 bar)
2. Time interval parameter set at the controller
3. Manual start, triggered by the ADI-P mobile app (within Bluetooth range) or via electronic controller keypad
4. Flushing duration set with the ADI-P app.

The flush valve opens to atmosphere creating a strong suction force at the scanner nozzles, effectively removing dirt particles from the screen and discharging them from the filter.

### Mini Sigma Models

Amiad's Mini Sigma Series consists of the following models:

- 2" Mini Sigma for up to 30 m<sup>3</sup>/h (132 gpm)
- 3" Mini Sigma for up to 50 m<sup>3</sup>/h (220 gpm)
- 4" Mini Sigma for up to 80 m<sup>3</sup>/h (352 gpm)

## Amiad's ADI-P Controller

The Mini Sigma comes with the innovative ADI-P controller developed by Amiad specifically for its filters.



**Control** the Mini Sigma with your mobile device!



Interacts with Amiad's advanced, user-friendly ADI-P mobile app



One-of-a-kind monitoring and control functionality



Provides detailed filtration performance data



Bluetooth® range communication




Offline information storage available


Mini Sigma parts description

- 1


Coarse screen


- 2


Fine screen


- 3


Hydraulic turbine


- 4

Suction-scanner shaft


- 5

Suction-scanner nozzles





- 6

Flush valve
- 7

ADI-P controller
- 8

Integral anti vacuum

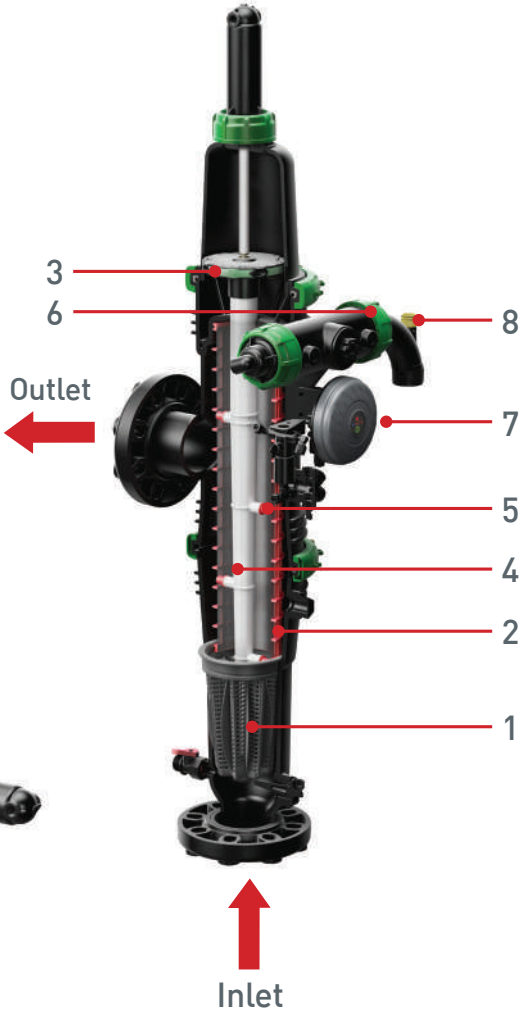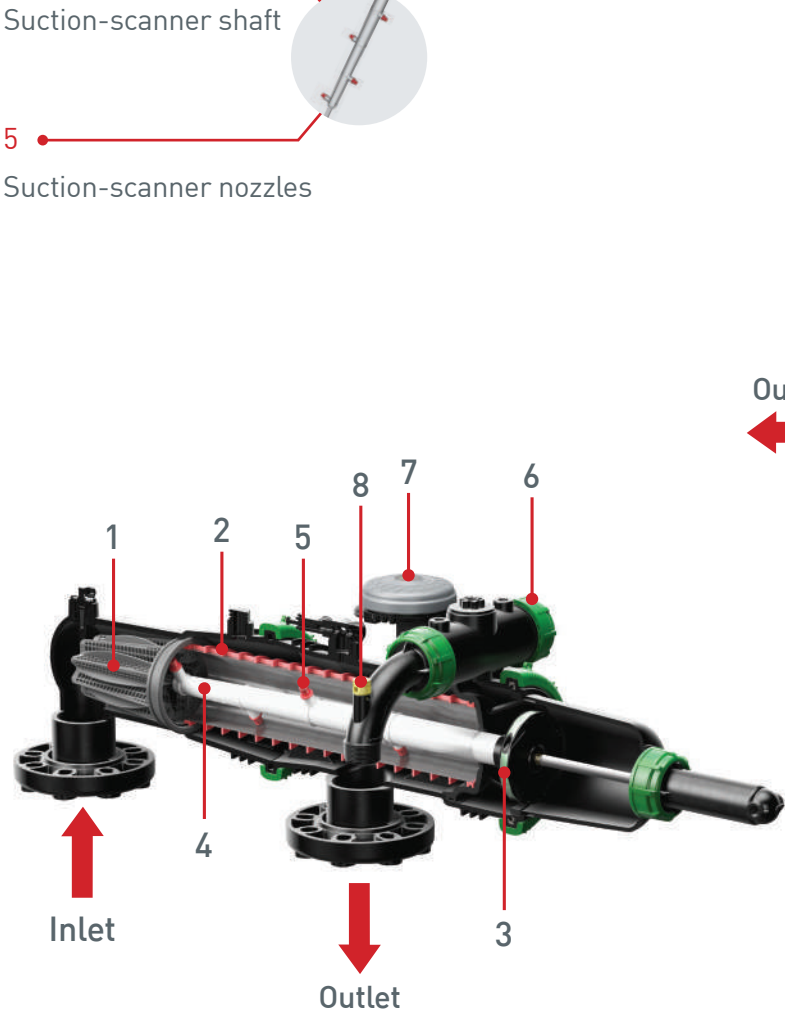

Technical Specifications

General data	2" Mini Sigma	3" Mini Sigma	4" Mini Sigma
Max. flow rate* (130µ)	30 m³/h (132 gpm)	50 m³/h (220 gpm)	80 m³/h (352 gpm)
Min. operating pressure when cleaning	1.5 bar (22 psi)		
Max. operating pressure	8 bar (116 psi)		
Filtration area	1,200 cm² (186 in²)	1,600 cm² (248 in²)	2,400 cm² (372 in²)
Inlet/Outlet diameter	2" (50 mm) BSPT/NPT	3" (80 mm) Grooved Coupling/ Universal flange	4" (100 mm) Grooved Coupling/ Universal flange
Weight (Empty)	16 kg (35 lbs)	20 kg (44 lbs)	23 kg (51 lbs)

\* Amiad's flow recommendation per water quality.

Electronic control	
Control power supply	4 x AA type 1.5V batteries and/or External 7-14 VDC
Solenoid	9-12 VDC latching solenoid
DP switch	Integral sensors




Flushing data (at 1.5 bar, 22 psi)			
Exhaust valve	1.5" (40 mm) BSPT/NPT		
Flushing time*	10 seconds		
Reject water volume per flush cycle*	24 liters (6.3 gallons)	26 liters (6.8 gallons)	28 liters (7.4 gallons)
Flushing flow rate*	8.7 m³/h (38.3 gpm)	9.6 m³/h (42.2 gpm)	10 m³/h (44 gpm)

\* Any pressure between 1.5 bar (22 psi) and 8 bar (116 psi) will improve these parameters.




Construction materials	
Filter housing and lid	RPA (reinforced polyamide)
Screens	Molded weavewire, stainless steel 316L
Cleaning mechanism	PBT (polybutylene)
Exhaust valve	All polymeric
Seals	EPDM
Control command tubing	PE (polyethylene)

Standard Filtration Degrees							
micron	500	300	200	130	100	80	50
mm	0.5	0.3	0.2	0.13	0.1	0.08	0.05




2” Mini Sigma on-line

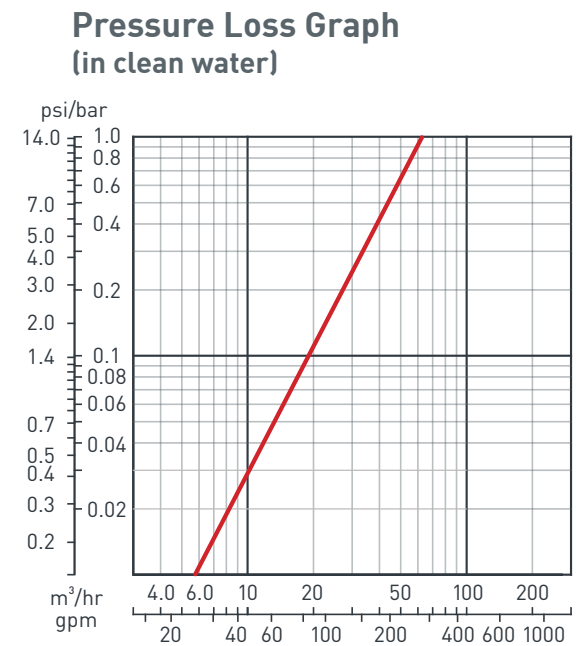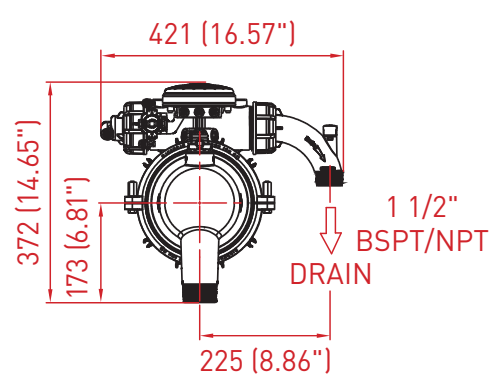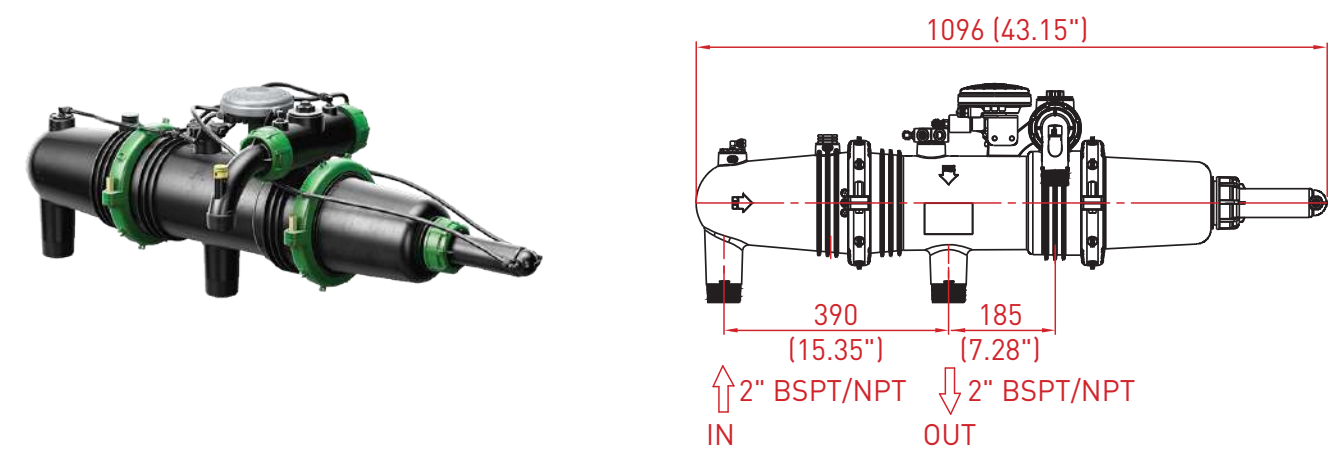

3” Mini Sigma on-line

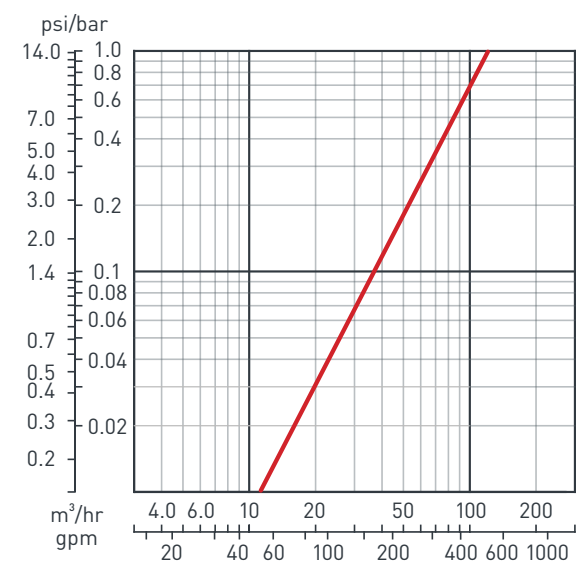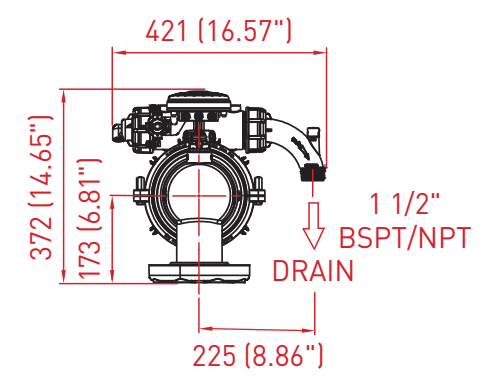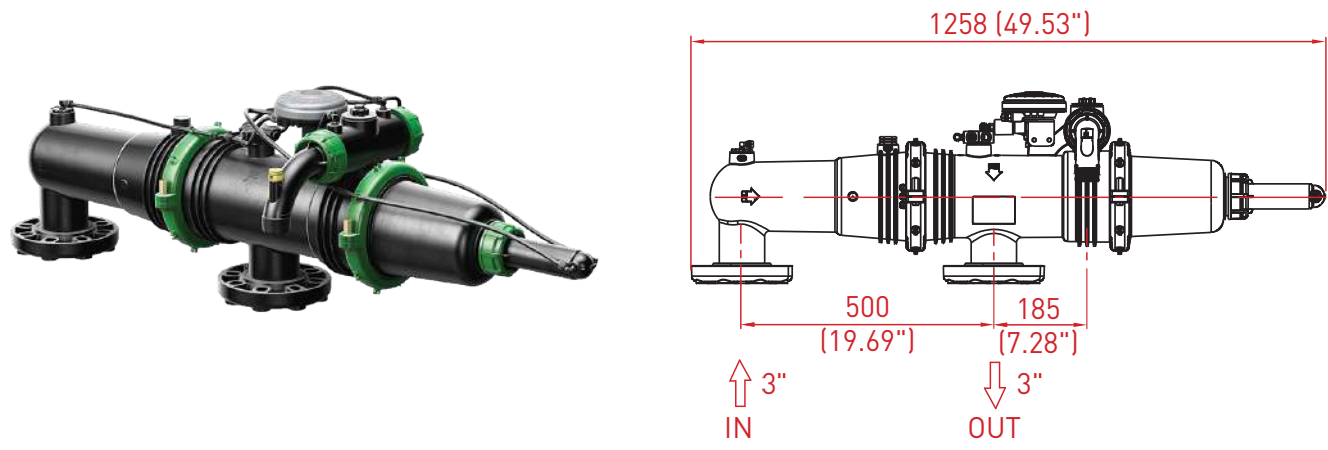

4” Mini Sigma on-line

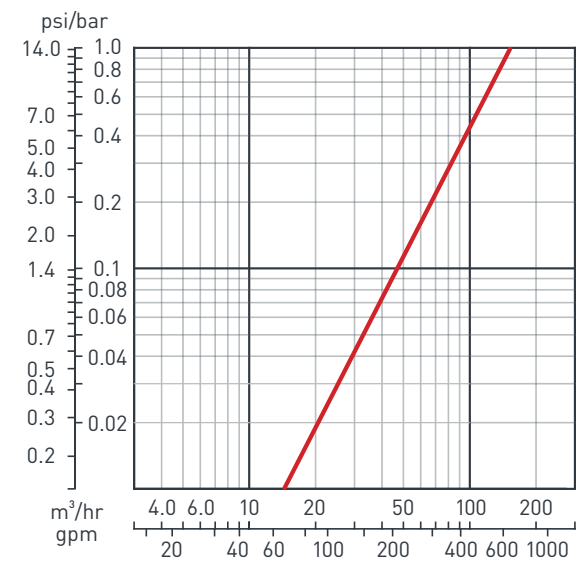
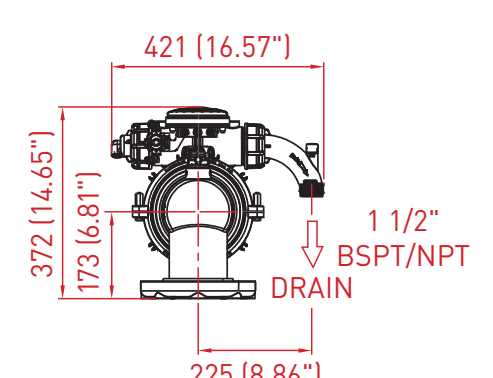
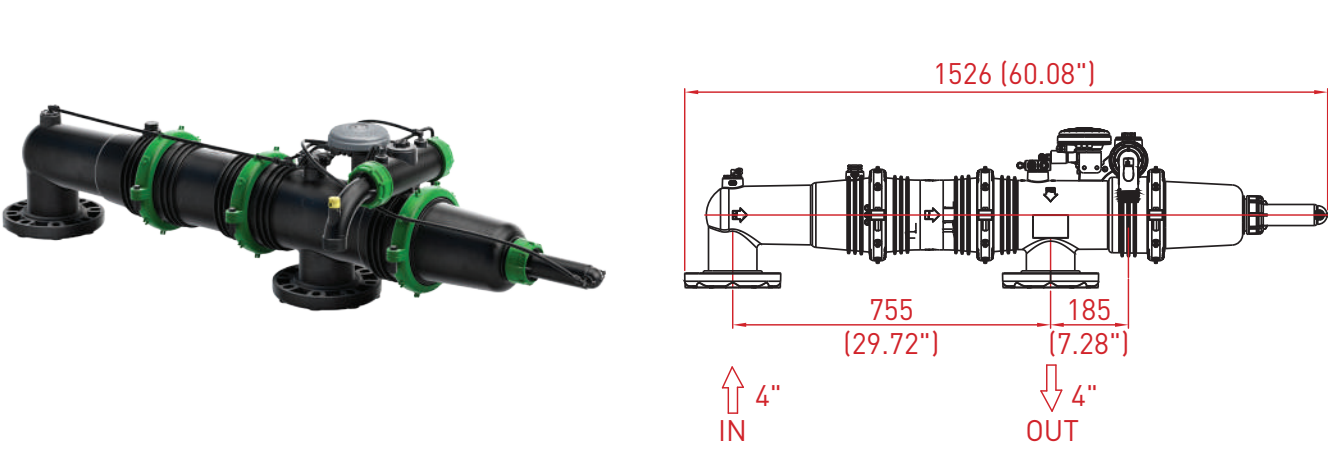


Dim: mm (inch)




Dim: mm (inch)






2" Mini Sigma angle

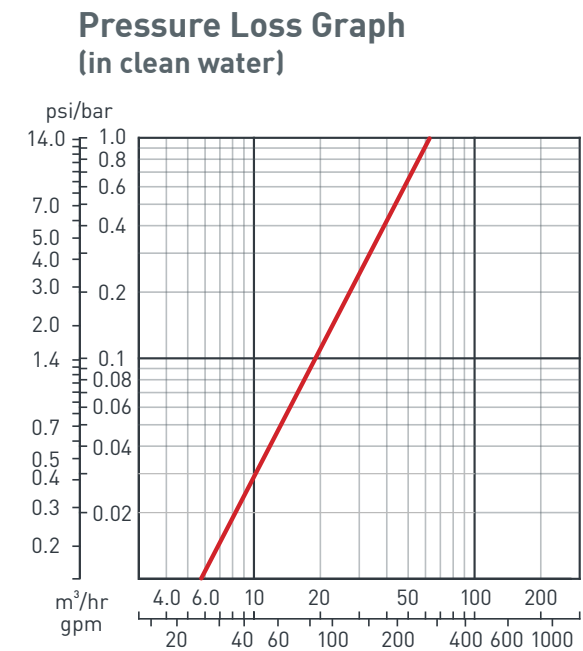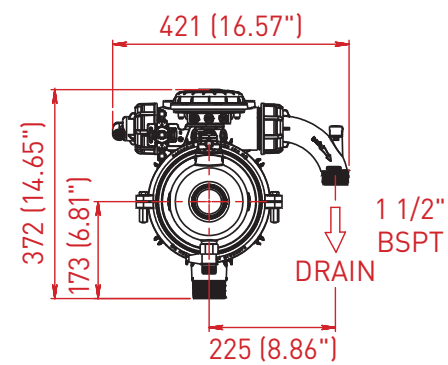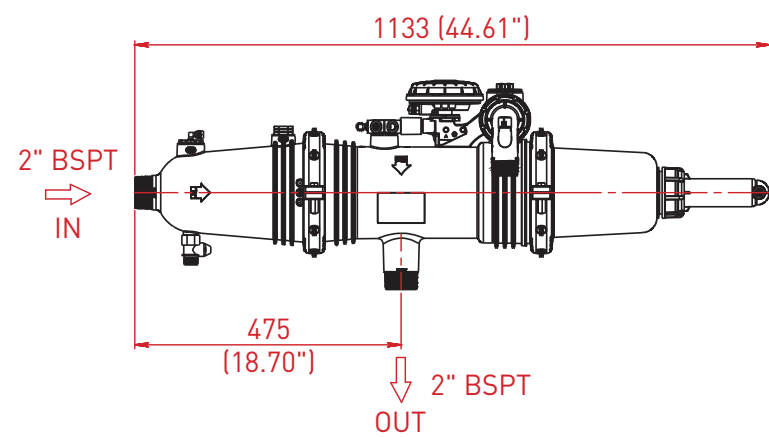

3" Mini Sigma angle

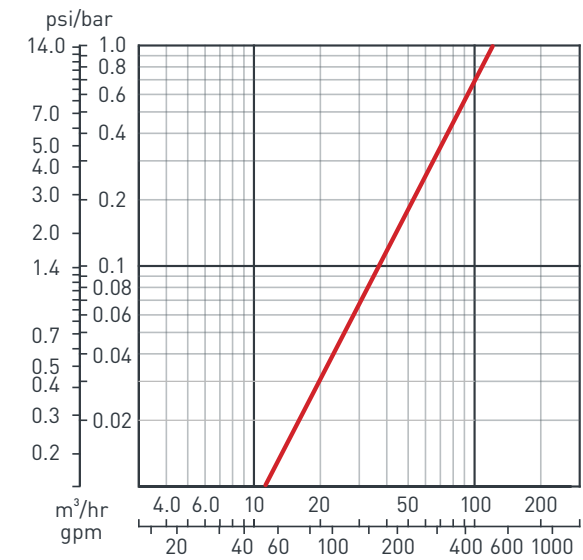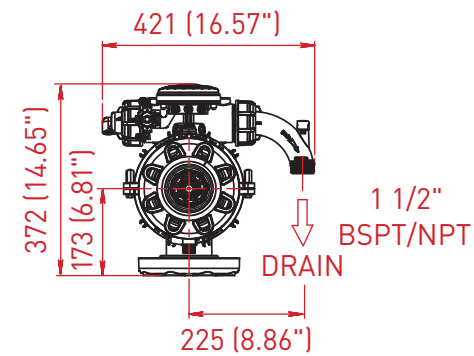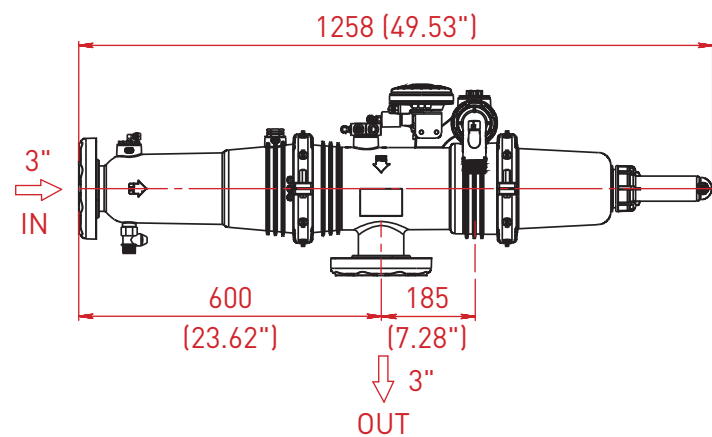

4" Mini Sigma angle

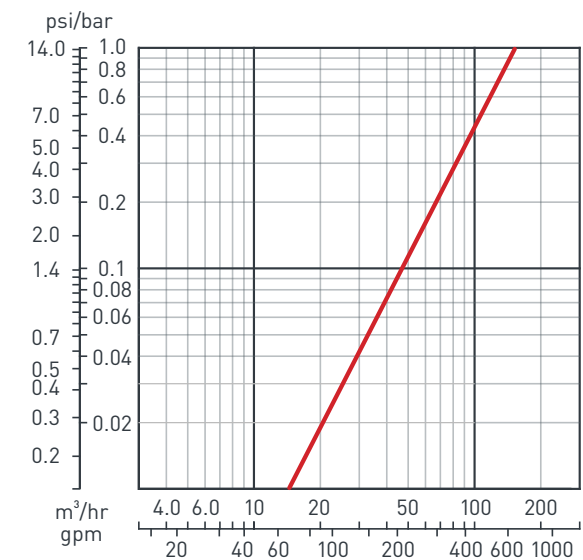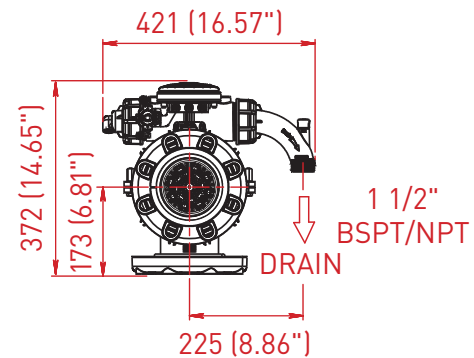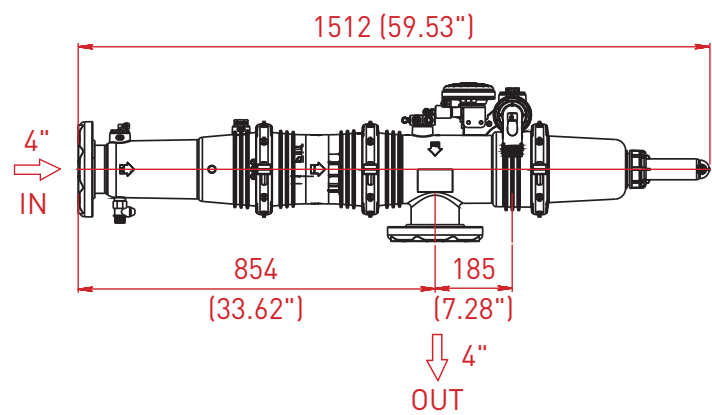




Dim: mm (inch)


Dim: mm (inch)

# Mini Sigma Configuration Options

Advanced design for **maximum installation flexibility:**



-  Modular, versatile inlet and outlet options
-  Horizontal or vertical configuration
-  360° rotation of the drain pipe to fit any installation configuration

On-line

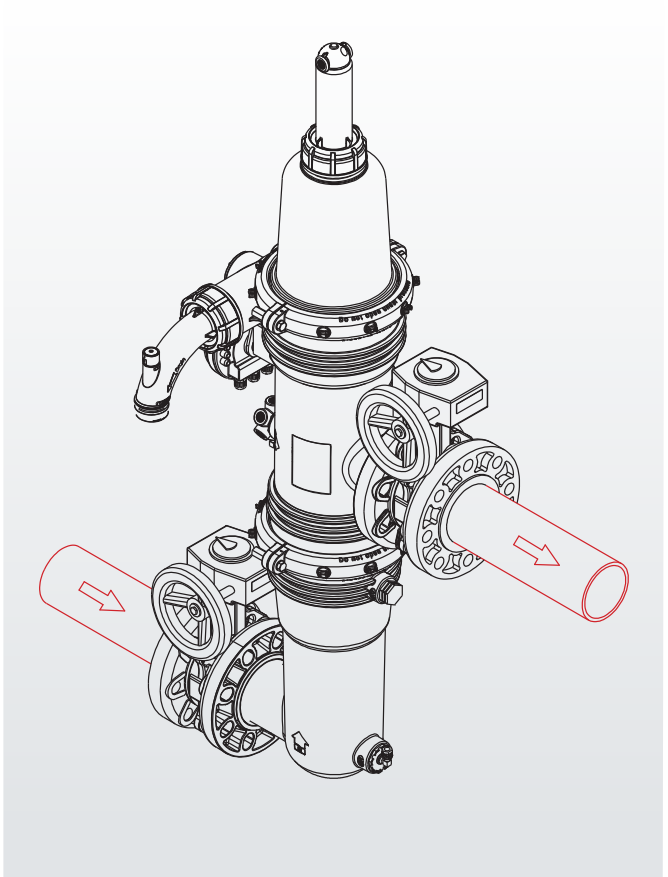


Vertical

Angle

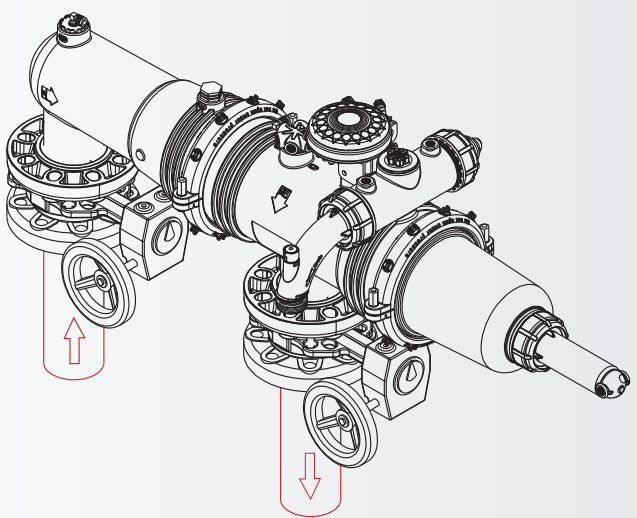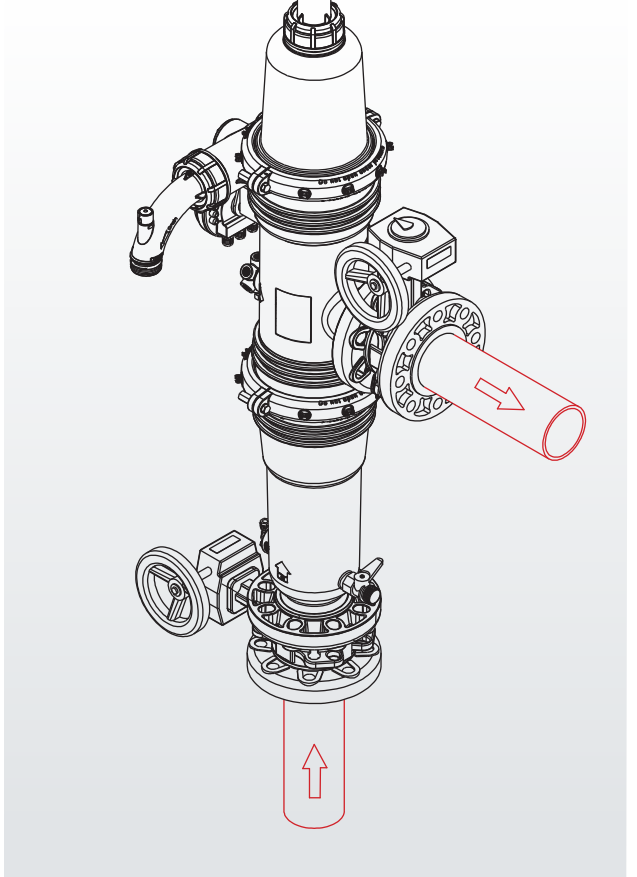

On-line

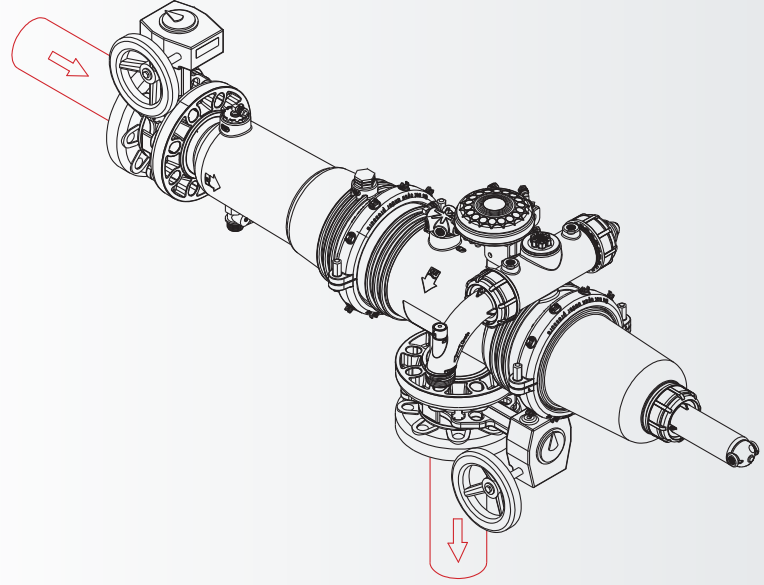

Angle

Horizontal

## Headquarters

**Amiad Water Systems Ltd.**

Web: [www.amiad.com](http://www.amiad.com) | E-mail: [info@amiad.com](mailto:info@amiad.com)

## The Americas



USA

**Amiad USA Inc.**

Web: [www.amiadusa.com](http://www.amiadusa.com) | E-mail: [infousa@amiad.com](mailto:infousa@amiad.com)

Mexico

**Amiad México SA DE CV,**

Web: [www.amiad.es](http://www.amiad.es) | E-mail: [infomexico@amiad.com](mailto:infomexico@amiad.com)

**Irrigation office:** E-mail: [infomexico-irr@amiad.com](mailto:infomexico-irr@amiad.com)

## Asia



India

**Amiad Filtration India Pvt Limited**

Web: [www.amiadindia.com](http://www.amiadindia.com) | E-mail: [info-india@amiad.com](mailto:info-india@amiad.com)

China

**Amiad China (Yixing Taixing Environtec Co., Ltd.)**

Web: [www.amiad.com.cn](http://www.amiad.com.cn) | E-mail: [marketing@taixing.cc](mailto:marketing@taixing.cc)

South-East Asia

**Filtration & Control Systems Pte. Ltd.**

E-mail: [info-singapore@amiad.com](mailto:info-singapore@amiad.com)

## Australia



**Amiad Australia Pty Ltd.**

Web: [www.amiad.com.au](http://www.amiad.com.au) | E-mail: [sales@amiad.com](mailto:sales@amiad.com)

## Europe



**Amiad Water Systems Europe SAS**

E-mail: [info@amiad-europe.com](mailto:info@amiad-europe.com)

**German branch office**

E-mail: [info@amiad.de](mailto:info@amiad.de)

United Kingdom

**Amiad Water Systems UK Limited**

E-mail: [info-uk@amiad.com](mailto:info-uk@amiad.com)



[www.amiad.com](http://www.amiad.com)

910101-000956/08.2020

Copyright © 2019 Amiad Water Systems Ltd. All rights reserved. The contents of this catalogue including without limitation all information and materials, images, illustrations, designs, icons, photographs, graphical presentations, designs, literary works, data, drawings, slogans, phrases, names, trademarks, titles and any other such materials that appear in this catalogue (collectively, the "Contents") are the sole property of Amiad Water Systems Ltd. ("Amiad"). Amiad has sole and exclusive right, title and interest in the Contents, including any intellectual property rights, whether registered or not, and all know-how contained or embodied therein. You may not reproduce, publish, transmit, distribute, display, modify, create derivative works from, sell or participate in any sale of, or exploit in any way, in whole or in part, any of the Contents or the catalogue. Any use of the catalogue or the Contents, other than for personal use, requires the advanced written permission of Amiad.

The Bluetooth® word mark and logos are registered trademarks owned by the Bluetooth SIG, Inc. and any use of such marks by Amiad Water Systems is under license. Other trademarks and trade names are those of their respective owners.

For more details about our patents go to: [www.amiad.com](http://www.amiad.com)